



Check Point 4800 Appliance

Today the enterprise gateway is more than a firewall. It is a security device presented with an ever-increasing number of sophisticated threats. As an enterprise security gateway it must use multiple technologies to control network access, detect sophisticated attacks and provide additional security capabilities like data loss prevention and protection from web-based threats. The proliferation of mobile devices like smartphones and Tablets and new streaming, social networking and P2P applications requires a higher connection capacity and new application control technologies. Finally, the shift towards enterprise private and public cloud services, in all its variations, changes the company borders and requires enhanced capacity and additional security solutions.

Check Point's new appliances combine fast networking technologies with high performance multi-core capabilities—providing the highest level of security without compromising on network speeds to keep your data, network and employees secure. Optimized for the Software Blades Architecture, each appliance is capable of running any combination of Software Blades—providing the flexibility and the precise level of security for any business at every network location by consolidating multiple security technologies into a single integrated solution.

Each Check Point Appliance supports the Check Point 3D security vision of combining policies, people and enforcement for unbeatable protection and is optimized for enabling any combination of the following Software Blades: (1) Firewall, (2) VPN, (3) IPS, (4) Application Control, (5) Mobile Access, (6) DLP, (7) URL Filtering, (8) Antivirus, (9) Anti-spam, (10) Identity Awareness and (11) Advanced Networking & Clustering.

OVERVIEW

The Check Point 4800 Appliance offers a complete and consolidated security solution, with leading performance in a 1U form factor. In addition to eight onboard 1 Gigabit copper Ethernet ports, the 4800 also comes with an available expansion slot which provides the option to add four or eight 1 Gigabit copper Ethernet ports, two or four 1 Gigabit fiber Ethernet ports or two 10 Gigabit fiber Ethernet ports.

With 623 SecurityPower Units, the 4800 Appliance offers superior performance for its price range with a firewall throughput of 11 Gbps and IPS throughput of 6 Gbps.

KEY FEATURES

- 623 SecurityPower™
- 11 Gbps of firewall throughput
- 6 Gbps of IPS throughput
- Up to 16 10/100/1000Base-T ports
- Up to 4 1GbE or 2 10GbE Fiber ports
- Optional Lights-Out-Management (LOM)

KEY BENEFITS

- Mid-size, enterprise-grade appliance optimized for multiple Software Blades performance
- Delivers everything you need to secure your network in one appliance
- Simplifies administration with a single integrated management console
- Ensures data security by securing remote access and site-to-site communications
- Provides comprehensive security and protects against emerging threats with Extensible Software Blade Architecture

GATEWAY SOFTWARE BLADES


	4807	4808	4810
Firewall	■	■	■
IPsec VPN	■	■	■
Mobile Access (5 users)	■	■	■
Advanced Networking & Clustering	■	■	■
Identity Awareness	■	■	■
IPS	■	■	■
Application Control	■	■	■
Data Loss Prevention	*	■	*
URL Filtering	*	*	■
Antivirus & Anti-malware	*	*	■
Anti-spam	*	*	■

*Optional



4800

- ① One network card expansion slot
- ② Lights Out Management card (optional)
- ③ 8 x 10/100/1000Base-T RJ45 ports
- ④ Two USB ports for ISO installation
- ⑤ Console port RJ45
- ⑥ Graphic LCD display for management IP address and image management
- ⑦ One AC power supply
- ⑧ Second redundant hot-swappable AC power supply (optional)
- ⑨ 4GB RAM upgrade (optional)
- ⑩ Standard rack mount (Slide rails optional)

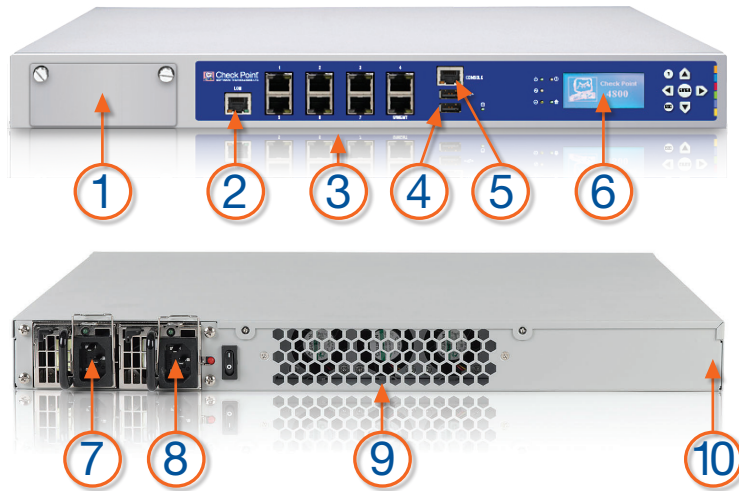

SECURITYPOWER

Until today security appliance selection has been based upon selecting specific performance measurements for each security function, usually under optimal lab testing conditions and using a security policy that has one rule. Today customers can select security appliances by their SecurityPower ratings which are based on real-world customer traffic, multiple security functions and a typical security policy.

SecurityPower is a new benchmark that measures the capability and capacity of an appliance to perform multiple advanced security functions (Software Blades) such as IPS, DLP and Application Control in real world traffic conditions. This provides an effective metric to better predict the current and future behavior of appliances under security attacks and in day-to-day operations. Customer SecurityPower Unit (SPU) requirements, determined using the Check Point Appliance Selection Tool, can be matched to the SPU ratings of Check Point Appliances to select the right appliance for their specific requirements.

ALL-INCLUSIVE SECURITY SOLUTION

The Check Point 4800 Appliance offers a complete and consolidated security solution in a compact 1U chassis based on the Check Point Software Blade Architecture. Available with 3 software packages of 7, 8 and 10 Blades, the platform provides up-to-date and extensible security protection.

INTEGRATED SECURITY MANAGEMENT

The appliance can either be managed locally with its available integrated security management or via central unified management. Using local management, the appliance can manage itself and one adjacent appliance for high availability purposes.

REMOTE ACCESS CONNECTIVITY FOR MOBILE DEVICES

Each appliance arrives with mobile access connectivity for 5 users, using the Mobile Access Blade. This license enables secure remote access to corporate resources from a wide variety of devices including smartphones, tablets, PCs, Mac and Linux

REMOTE PLATFORM MANAGEMENT AND MONITORING

A LOM option is also available, providing out-of-band remote management to remotely diagnose, start, restart and manage the appliance from a remote location. Administrators can also use the LOM web interface to remotely install an OS image from an ISO file.



TECHNICAL SPECIFICATIONS

Base Configuration
8 x 10/100/1000Base-T RJ45 ports
4 GB memory
250 GB hard disk drive
One AC power supply
Standard rack mount
Network Expansion Slot Options
4 x 10/100/1000Base-T RJ45 ports
8 x 10/100/1000Base-T RJ45 ports
2 x 1000Base-F SFP ports ¹
4 x 1000Base-F SFP ports
2 x 10GBaseF SFP+ ports
Max Configuration
16 x 10/100/1000Base-T RJ45 ports
8 x 10/100/1000Base-T RJ45 + 4 x 1000Base-F SFP ports
8 x 10/100/1000Base-T RJ45 + 2 x 10GBase-F SFP+ ports
8 GB memory
LOM card
Two redundant hot-swappable power supplies
Performance
623 SecurityPower ²
11 Gbps of firewall throughput, 1518 byte UDP
2 Gbps of VPN throughput, AES-128
6 Gbps of IPS throughput Default IPS profile
1.5 Gbps of IPS throughput Recommended IPS profile
3.5 ³ million concurrent connections
70,000 connections per second
Network Connectivity
1024 VLANs
256 VLANs per interface
802.3ad passive and active link aggregation
Layer 2 (transparent) and Layer 3 (routing) mode

High Availability
Active/Active - L3 mode
Active/Passive - Transparent & L3 mode
Session synchronization for firewall and VPN
Session failover for routing change
Device failure detection
Link failure detection
Dimensions
Enclosure: 1U
Standard (W x D x H): 17.25 x 16.14 x 1.73 in.
Metric (W x D x H): 438 x 410 x 44 mm
Weight: 7.6 kg (16.76 lbs.)
Power Requirements
AC Input Voltage: 100 - 240V
Frequency: 47-63 Hz
Single Power Supply Rating: 275 W
Power Consumption Maximum: 140 W
Maximum thermal output: 425.6 BTU
Operating Environmental Conditions
Temperature: 32° to 104°F / 0° to 40°C
Humidity: 20% - 90% (non-condensing)
Storage Conditions
Temperature: -4° to 158°F / -20° to 70°C
Humidity: 5% - 95% @ 60°C (non-condensing)
Certifications
Safety: UL, cUL, CB
Emissions: CE, FCC, TUV, VCCI, C-Tick
Environmental: RoHS

¹ Available in Q1 2012

² SecurityPower: A metric to measure appliance performance based on real world traffic given the deployed software blades. Find the right appliance for your performance and security needs.

³ With software upgrade available in 2012



Datasheet: Check Point 4800 Appliance

SOFTWARE PACKAGE SPECIFICATIONS

Base Packages	SKU
4800 Appliance with 7 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control blades), bundled with local management for up to 2 gateways	CPAP-SG4807
4800 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades); bundled with local management for up to 2 gateways	CPAP-SG4808
4800 Appliance with 10 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Anti-Malware, and Email Security blades); bundled with local management for up to 2 gateways	CPAP-SG4810
4800 Appliance with 7 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control blades); bundled with local management for up to 2 gateways; for High Availability	CPAP-SG4807-HA
4800 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades); bundled with local management for up to 2 gateways; for High Availability	CPAP-SG4808-HA
4800 Appliance with 10 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Anti-Malware, and Email Security blades); bundled with local management for up to 2 gateways; for High Availability	CPAP-SG4810-HA
Software Blades Packages	SKU
Check Point Extended Security Software Blades Package for 1 year for 4800 appliance (including IPS, URL Filtering, Application Control, Anti-Malware, Email Security, and DLP blades)	CPSB-ESEC-6B-4800
Check Point UTM+ Software Blades Package for 1 year for 4800 appliance (including IPS, URL Filtering, Application Control, Anti-Malware, and Email Security blades)	CPSB-UTMP-5B-4800
Check Point Extended Threat Protection Software Blades Package for 1 year for 4800 (including Application Control and IPS blades)	CPSB-ETPR-2B-4800
Check Point DLP+ Software Blades Package for 1 year for 4800 appliance (including IPS, Application Control, and DLP)	CPSB-DLPP-3B-4800
Check Point Web Control Software Blades Package for 1 year for 4800 (including Application Control and URL Filtering blades)	CPSB-WBCL-2B-4800
Check Point Extended Security Software Blades Package for 1 year for 4800 appliance (including IPS, URL Filtering, Application Control, Anti-Malware, Email Security, and DLP blades); for High Availability	CPSB-ESEC-6B-4800-HA
Check Point UTM+ Software Blades Package for 1 year for 4800 appliance (including IPS, URL Filtering, Application Control, Anti-Malware, and Email Security blades); for High Availability	CPSB-UTMP-5B-4800-HA
Check Point Extended Threat Protection Software Blades Package for 1 year for 4800 (including Application Control and IPS blades); for High Availability	CPSB-ETPR-2B-4800-HA
Check Point DLP+ Software Blades Package for 1 year for 4800 appliance (including IPS, Application Control, and DLP); for High Availability	CPSB-DLPP-3B-4800-HA
Check Point Web Control Software Blades Package for 1 year for 4800 (including Application Control and URL Filtering blades); for High Availability	CPSB-WBCL-2B-4800-HA
Additional Software Blades	SKU
Check Point Mobile Access Blade for up to 200 concurrent connections	CPSB-MOB-200
Data Loss Prevention Blade for 1 year (for 500 to 1,500 users, up to 50,000 mails per hour and max throughput of 1.5 Gbps)	CPSB-DLP-1500
Check Point IPS blade for 1 year	CPSB-IPS
Check Point Application Control blade for 1 year	CPSB-APCL
Check Point URL Filtering blade for 1 year	CPSB-URLF-M
Check Point Anti-Virus & Anti-Malware Blade for 1 year	CPSB-AV
Check Point Anti-Spam & Email Security Blade for 1 year	CPSB-ASPM
Check Point Mobile Access Blade for up to 200 concurrent connections; for High Availability	CPSB-MOB-200-HA
Data Loss Prevention Blade for 1 year (for 500 to 1,500 users, up to 50,000 mails per hour and max throughput of 1.5 Gbps); for High Availability	CPSB-DLP-1500-HA
Check Point IPS blade for 1 year; for High Availability	CPSB-IPS-HA
Check Point Application Control blade for 1 year; for High Availability	CPSB-APCL-HA
Check Point URL Filtering blade for 1 year; for High Availability	CPSB-URLF-M-HA
Check Point Anti-Virus & Anti-Malware Blade for 1 year; for High Availability	CPSB-AV-HA
Check Point Anti-Spam & Email Security Blade for 1 year; for High Availability	CPSB-ASPM-HA



ACCESSORIES

Interface Cards and Transceivers	SKU
4 Port 10/100/100 Base-T RJ45 interface card	CPAC-4-1C
8 Port 10/100/100 Base-T RJ45 interface card	CPAC-8-1C
4 Port 1000Base-F SFP interface card; requires additional 1000Base SFP transceiver modules per interface port	CPAC-4-1F
SFP transceiver module for 1G fiber ports - long range (1000Base-LX) for CPAC-4-1F	CPAC-TR-1LX
SFP transceiver module for 1G fiber ports - short range (1000Base-SX) for CPAC-4-1F	CPAC-TR-1SX
2 Port 10GBase-F SFP+ interface card; requires an additional 10GBase SFP+ transceiver per interface port	CPAC-2-10F
SFP+ transceiver module for 10G fiber ports - long range (10GBase-LR) for CPAC-2-10F, CPAC-4-10F	CPAC-TR-10LR
SFP+ transceiver module for 10G fiber ports - short range (10GBase-SR) for CPAC-2-10F, CPAC-4-10F	CPAC-TR-10SR
Spares and Miscellaneous	SKU
4GB RAM Memory upgrade for 4800 appliances	CPAC-RAM4GB
Additional/replacement AC Power Supply for 4800 appliance	CPAC-PSU-4800
Lights out Management interface card for 4800, 12200, 12400, 12600 appliances	CPAC-LOM
Slide RAILS for Check Point Appliance	CPAC-RAILS

CONTACT CHECK POINT

Worldwide Headquarters

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

U.S. Headquarters

800 Bridge Parkway, Redwood City, CA 94065 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com