

Stonesoft SSL-1035

Stonesoft SSL VPN Appliance Datasheet

The Stonesoft SSL-1035 offers flexible and secure remote access to enterprise data, applications and networking resources. It delivers secure and cost-effective access by establishing an encrypted VPN tunnel across the Internet. The solution brings network resources as close as the nearest Internet connection, regardless of connectivity media or device.

With a maximum capacity of 1000 concurrent users the Stonesoft SSL-1035 is ideal for small to medium-sized organizations that need to easily provide controlled and flexible remote access for their employees, partners, and customers. The solution enables organizations to fully control the information that can be accessed. Access to different applications can be granted based on user identity, method of login, access location and the security level of the access device. The solution guards the security of the network while providing access from anywhere, at any time, and with any device.


The Stonesoft SSL-1035 offers simple deployment, flexible administration and ease of use. This ensures a future-proof solution for any remote connectivity deployment.

Combined with Stonesoft Intrusion Prevention Systems and Firewalls, SSL VPN forms a multidimensional defense system where networks are protected with several layers of security that communicate seamlessly together. This field-proven technology expands comprehensive protection to the whole network and raises network security to a previously unseen level.

Stonesoft SSL VPN provides access to solutions that require total mobility, premium class security and unrivalled ease of management.

STONESOFT

Stonesoft SSL-1035 Specifications

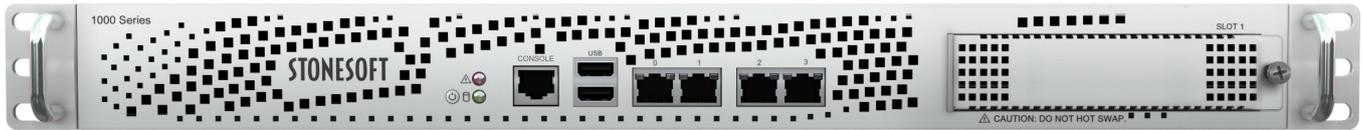

HARDWARE

Network interfaces	4 x 10/100/1000 Mbps copper
Module slots	1 (Available modules listed at the product codes section)
Connectors	RS-232 serial console, 2 x USB
Form factor	1U 19" rack unit
Dimensions (W x H x D)	426 x 44 x 300mm/ 16.77 x 1.73 x 11.81 inches
Net weight	4.2 kg / 9.25 lbs without module, C1 model
Gross weight	7.8 kg/17.2 lbs, w/o module
Power supply	AC input: 100V-240V, 3 – 1 A, 50-60 Hz
Max typical power consumption	50W

OTHER

Operating temperature/ humidity	+5... +40°C (+41... +104° F) 10%-95% non-condensing humidity (RH)
Storage temperature/ humidity	-20...+70°C (-4...158° F) 10%-95% non-condensing humidity (RH)
MTBF	120 000 hours
Rack mounting	Mounting accessories for front mounting included by default.
Safety/EMC Certifications	CE, FCC, CB, Gost-R, RoHS
Performance	Support for up to 1000 concurrent users

SUPPORT

Replacement service	15 months or 39 months replacement service for non-complying hardware
Premium support	24/7-call logging via web, email and phone, two- hour response time, software updates, hardware replacement service
Basic support	8/5-call logging via web, email and phone, next business day response time, software updates, hardware replacement service

PRODUCT CODES

APP-SSL-1035-C1-50	SSL-1035 appliance for 50 users
APP-SSL-1035-C1-100	SSL-1035 appliance for 100 users
APP-SSL-1035-C1-250	SSL-1035 appliance for 250 users
APP-SSL-1035-C1-500	SSL-1035 appliance for 500 users
APP-SSL-1035-C1-1000	SSL-1035 appliance for 1000 users

INTERFACE MODULES

MOD-EM1-GE-4	Quad Port Gigabit Ethernet Copper Module
MOD-EM1-GE-8	Eight Port Gigabit Ethernet Copper Module
MOD-EM1-GE-SFP-4	Quad Port SFP Gigabit Ethernet Module
MOD-EM1-10G-SFP-2	Dual Port SFP+ 10GB Module